






C042506
7.2K

	Rear Weight	Rated Operating Capacity*			⚠ Tipping Load ⚠		
		1	2	3	1	2	3
							
	0 kg	978 kg 2155 lbs	752 kg 1658 lbs	489 kg 1078 lbs	1222 kg 2694 lbs	940 kg 2072 lbs	611 kg 1347 lbs
	180 kg 400 lbs	1203 kg 2653 lbs	978 kg 2155 lbs	639 kg 1409 lbs	1504 kg 3316 lbs	1222 kg 2694 lbs	799 kg 1761 lbs
	0 kg	858 kg 1890 lbs	586 kg 1293 lbs	376 kg 829 lbs	1072 kg 2363 lbs	733 kg 1616 lbs	470 kg 1036 lbs
	180 kg 400 lbs	1075 kg 2370 lbs	752 kg 1658 lbs	526 kg 1161 lbs	1344 kg 2963 lbs	940 kg 2072 lbs	658 kg 1451 lbs

 REFER TO THE OPERATOR MANUAL FOR THE COMPREHENSIVE LOAD DIAGRAM. THE INDICATED VALUES INCLUDE THE WEIGHT OF THE ASSEMBLED PALLET FORK, SO THE NET VALUE IS THE VALUE SHOWN IN THE TABLE MINUS THE WEIGHT OF THE PALLET FORK.

* EN 474-3:2006 + A1:2009 - FORK APPLICATION

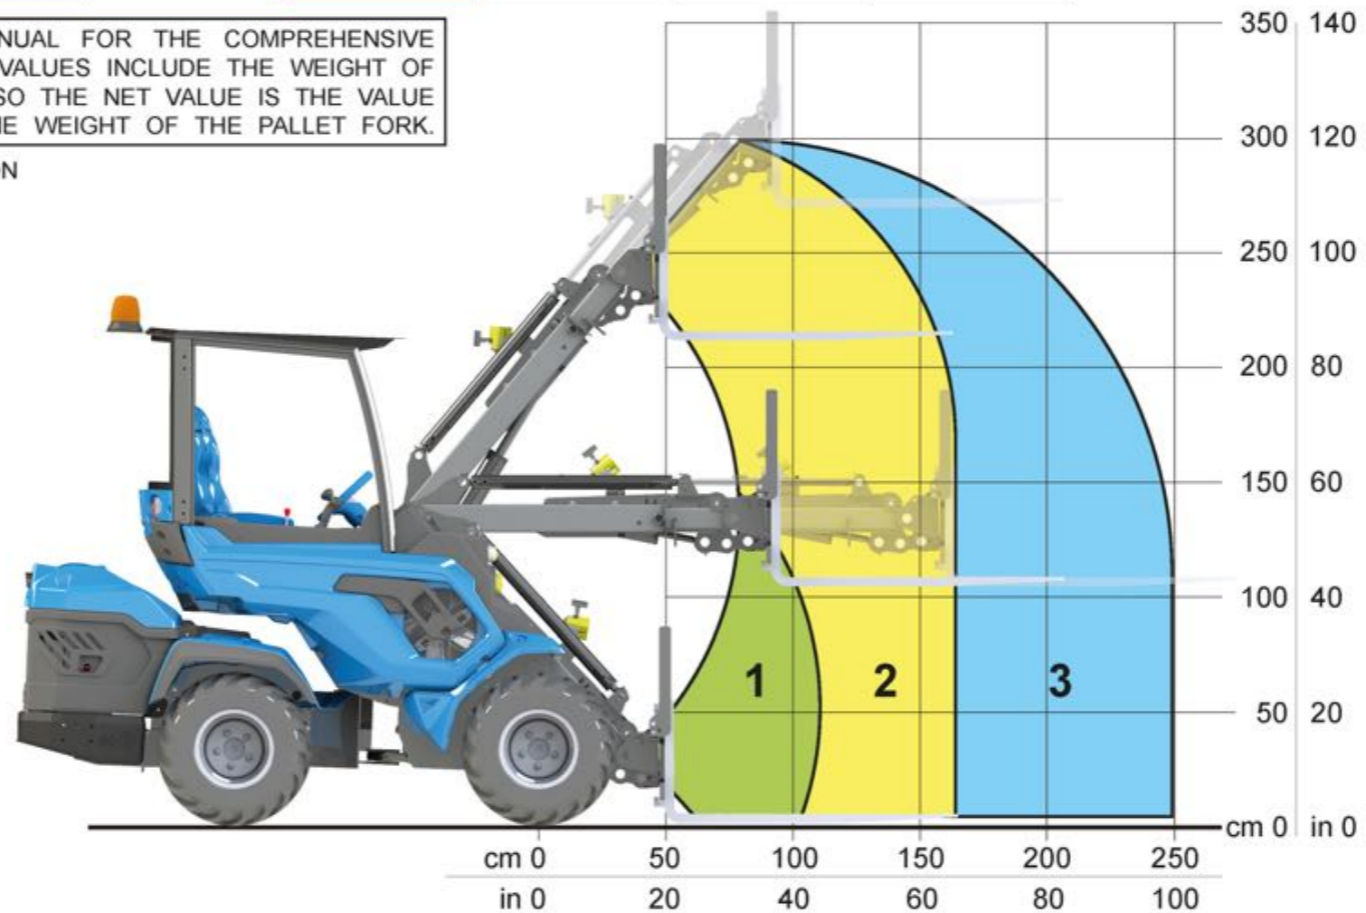

MULTI 1 ONE